

## Making Connections



It is the responsibility of the service technician to correctly prepare cables of proper-size and length when using the Phoenix connectors provided.

▶▶ **NOTE:** Connection illustrations listed below are provided with highlighted (in blue) port views.

1



Plug-in the power supply jack into the 12VDC (3.5A) power socket of the CA-1000.

2



Terminate the 5-pin Phoenix screw-down connector to the CH1 series-socket (next to 12VDC power port).

3



Connect CH2 mini-audio jack to the CH2 port highlighted to the left and as shown above.

4



Connect CH3 mini-audio jack to the CH3 port as shown above.

## Making Connections

5



Connect the 5-pin Phoenix connector to the speaker series-socket.

6




Plug-in the headphones to the jack port as shown above.

7



Connect the 4-pin IR Input/Output connector to the 4-pin socket as shown above.

8

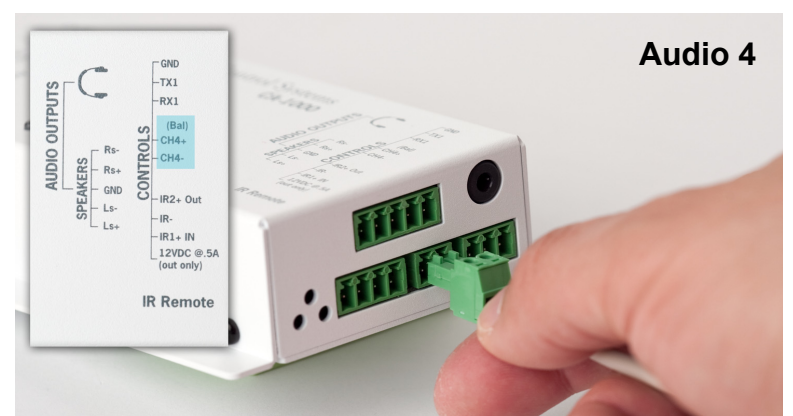


Terminate the 2-pin Phoenix connector to the CH4+/CH4- (Bal) series-socket as depicted above.

9



Terminate the 3-pin Phoenix connector to the 3-pin socket as shown in the photo above.

## What's in the Box

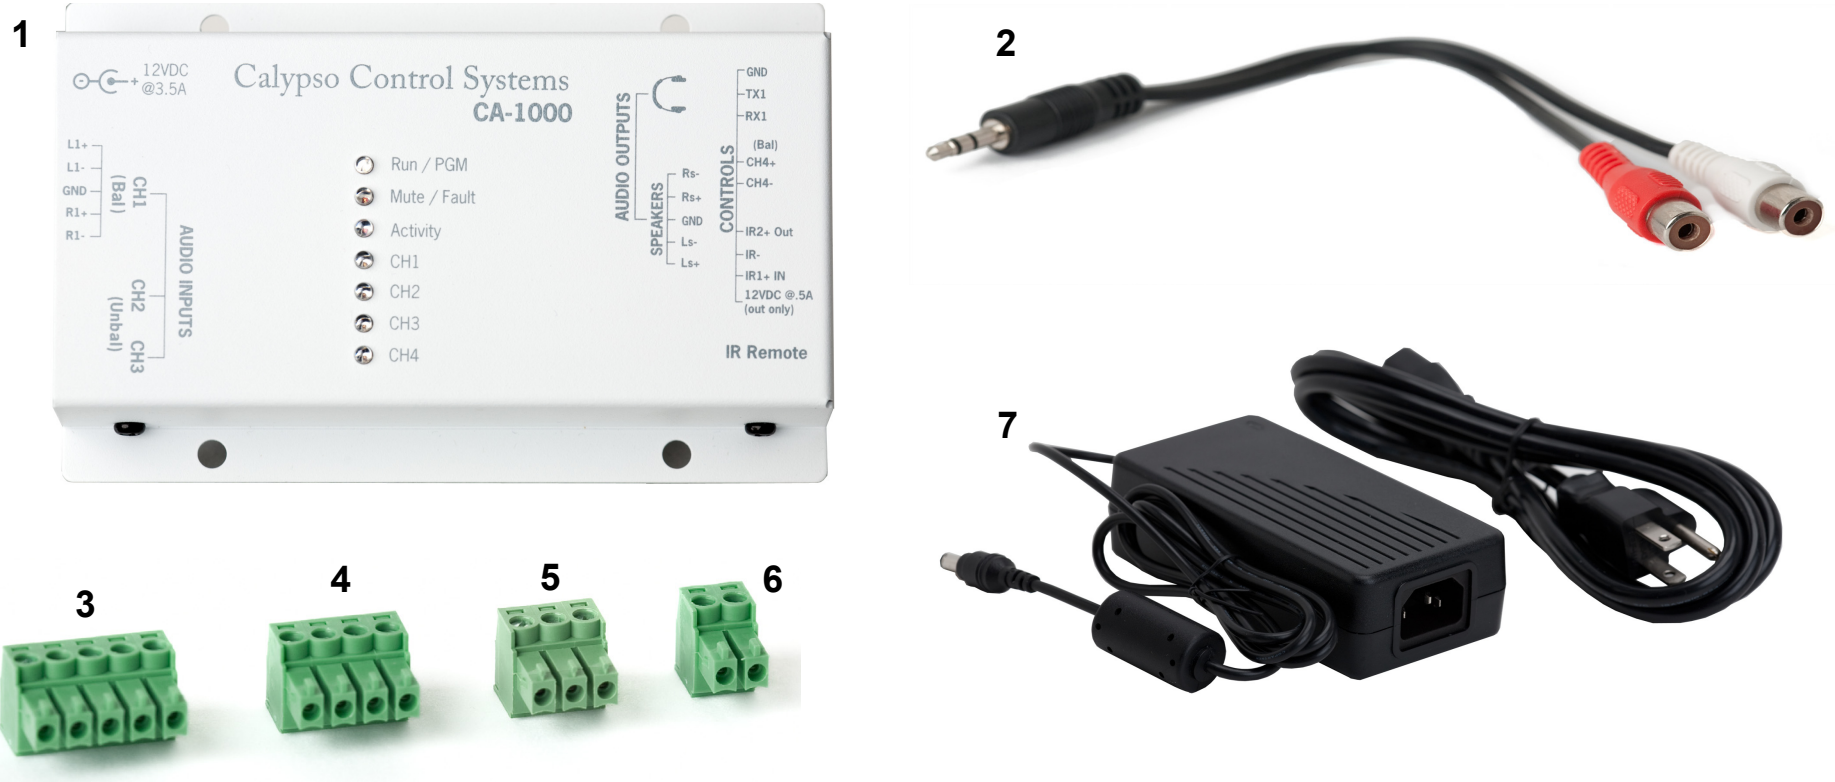

The list of components in the box contains the following items from top left to right: (1) 1 CA-1000, (2) 2 6 in. stereo-audio splitter cables, (3) 2 5-pin Phoenix connectors, (4) 1 4-pin Phoenix connector, (5) 1 3-pin Phoenix connector, (6) 1 2-pin Phoenix connector, and (7) 1 3.5A power supply.

## Flow Diagram

